

# CQAC Fan Forced Wall Heater

CI/SfB

56

TS 55



## Applications

Robust fan heaters for commercial areas such as entrance lobbies, stairways, corridors and waiting rooms. Ideal for heavy traffic areas where hard knocks are possible. Capacities, up to 4.8kW, for larger area heating requirements. The integral tamperproof thermostat provides a cost effective way of controlling energy usage.


## Features

- suitable for surface or space saving recess mounting.
- high reliability heavy duty finned metal sheathed elements.
- low speed, 600rpm, motor with vane axial fan.
- auto reset over temperature cut-out.
- fan delay switch on thermostat on/off cycle.
- tamperproof thermostat and on/off switch.(not ceiling version)
- heavy duty steel louvred grille with extruded aluminium frame.
- ceiling mounting version available
- dark brown powder coated finish with anodised natural aluminium frame.

## Installation [Download full installation instructions at www.cehltd.co.uk](http://www.cehltd.co.uk)

The heater is recommended for vertical mounting. It should not be mounted closer than 200mm to any vertical surface, ceiling or floor. Each unit is supplied for recess mounting. Surface mounting requires the optional surface box ( CQAC-S ). The unit should be securely fixed and electrical connections made by a suitably qualified person in accordance with the latest edition of the IEE Requirements for Electrical Installation (BS7671:2001).

## Specification

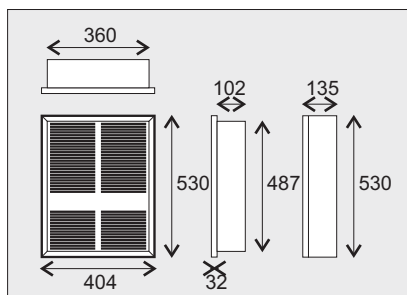

Cat No	Watts	Volts	AirVol m3/hr	Wt. (kgs)
CQAC-1500	1500	240	240	12.0
CQAC-2000	2000	240	240	12.0
CQAC-3000	3000	240	240	12.0
CQAC-4000	4000	240	240	12.0
CQAC-4800	4800	240	240	12.0
CQAC-S	Surface Box			3.0

The manufacturers reserve the right to change the specification without prior notice E&OE

